


biwin.co.uk




A400M

The Versatile Airlifter

- 1 Carefully cut out aircraft fuselage, wings and tail pieces, including the white slots in the fuselage piece.
- 2 Fold main fuselage of plane along the centre fold line.

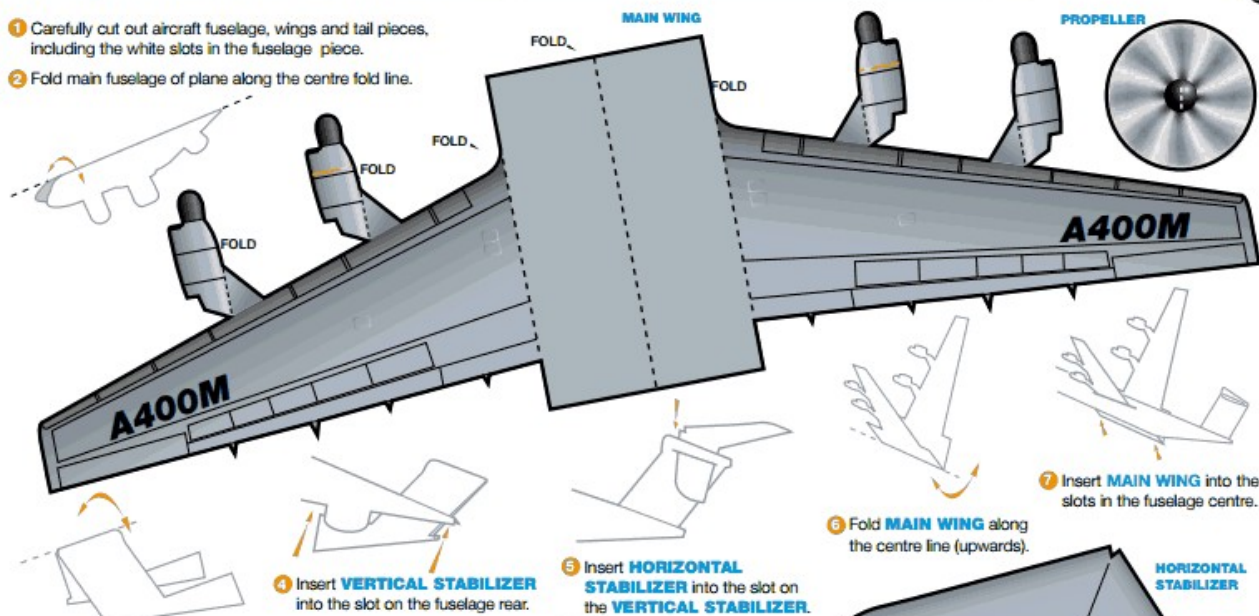

- 3 Fold **VERTICAL STABILIZER** along the centre line (downwards).

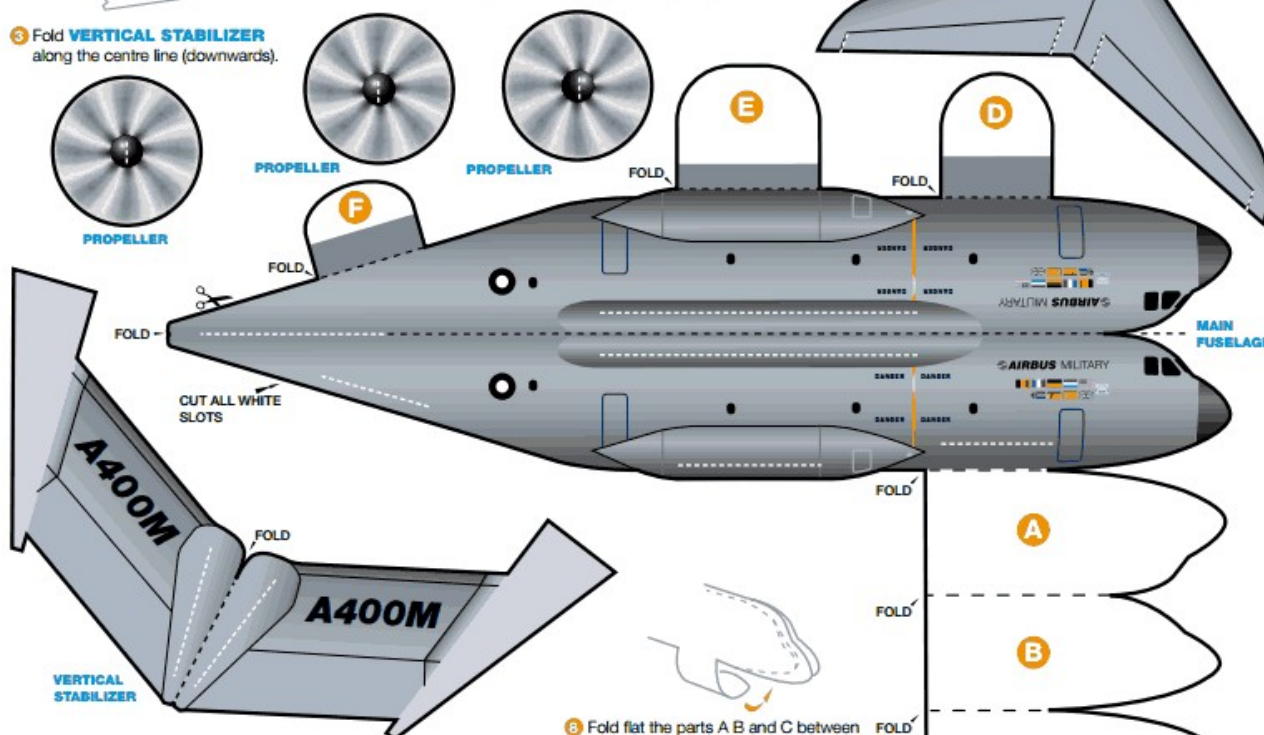

Flying tips

- Hold the plane under the wings and glide in a straight line
- Improved performance can be gained through slight adjustment of wings and tail
- Longer flying distances can be achieved by attaching a paper clip to the aircraft nose and also by cutting and raising the flaps in the **HORIZONTAL STABILIZER**.

CAUTION: DO NOT THROW AT PEOPLE, ANIMALS OR BREAKABLE OBJECTS.

- 8 Fold flat the parts A B and C between the two sides of the plane. Insert flaps D E and F into corresponding slots.



- 9 Fold both wings downwards until horizontal, and then fold down the engines. (Propellers can be added for static display).
- 10 **A400M** is now be ready to fly!



- 11 Use the header section as a stand by cutting along dotted lines - including the slots. Wrap round and slot ends together.